



INSTRUCTIONS FOR USING YOUR Cleat Hanging System

HARDWARE

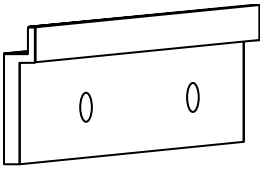

1 - WALL CLEAT

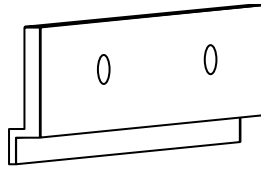


1 - FRAME CLEAT



SCREWS

Note: Don't let things get all scratchy! Place your frame face down on a smooth, flat surface when assembling.

1. If it is not already on your Frame, install the Frame Cleat on the back of the Frame first. The raised edge will face down.
2. Place the Wall Cleat on the wall at the top of the desired frame height. Mark the location of the Pre-Drilled Screw Holes on the wall. Be sure it is level and centered to support the Frame Cleat.
3. Secure the Wall Cleat to the wall with the appropriate Screws, Anchor Bolts or Toggle Bolts.

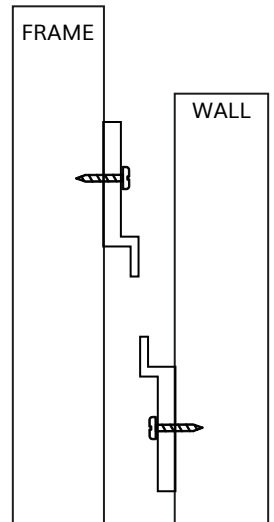

4. Hang Frame centered over Metal Cleat. The lip of the Frame Cleat will rest in to the Wall Cleat.

Note: There are a lot of ways to hang a frame, and that choice belongs to the user. Whatever way is chosen, please be sure to take every precaution to protect your property and person as we disclaim any and all liability for damage, loss or injury.